

DIMENSIONS

LENGTH OF VEHICLE	3.150 MM
LENGTH WITH FRONTAL BLADE	3.950 MM
LENGTH WITH ATTACHMENTS	5.600 MM
WIDTH	2.000 KG
HEIGHT	2.250 MM
WEIGHT WITHOUT ATTACHMENTS	1.890 KG
WEIGHT WITH ATTACHMENTS	2.200 KG
TOTAL WEIGHT	2.730 KG
MAX PERMISSIBLE WEIGHT	750 KG

ENGINES

VM R754IE4	
EMISSIONS	EC STAGE IIIB (EUR4)
POWER	108 HP AT 2.600 RPM
MAX. TORQUE	420 NM AT 1.100 RPM
4 CYLINDERS - COMMON RAIL	
TOTAL DISPLACEMENT	3.000 CC
BORE X STROKE	94 X 107 MM

KUBOTA V3800 DI-T-E3B	
POWER	100 HP AT 2.600 RPM
MAX. TORQUE	330 NM AT 1.300 RPM
NO. OF CYLINDERS	4
TOTAL DISPLACEMENT	3.770 CC
BORE X STROKE	100 X 120 MM
FUEL CONSUMPTION	6 L/H
TANK CAPACITY	60 L

TRACKS

LENGTH OF CONTACT WITH GROUND	2.750 MM
WIDTH	680 MM
MIDDLE RUT	1.220 MM

OPTIONAL EQUIPMENT

REAR CABIN WITH BACK OPENING
ALL-SEASON TRACKS

OPERATING DATA

SPEED:	0-19; 0-27 KM/H
TURNING CIRCLE	0° (ROTATION ON ITS AXIS)
MAXIMUM NOISE LEVEL	< 80 DB(A)
SPEC. GROUND PRESSURE	45 G/CM ²

ELECTRICAL SYSTEM

OPERATING VOLTAGE	12 V
BATTERIES	110 AMP/H
ALTERNATOR	720 WATTS

CABIN

ROPS CERTIFICATION
TILT CABIN
DRIVER'S SEAT AND PASSENGER SEAT
SAFETY BELTS, RADIO/CD PLAYER WITH STEREO
SPEAKERS, HEATING SYSTEM


ATTACHMENTS

FRONTAL BLADE
- STANDARD: 8-WAY BLADE (2.000 MM WIDTH)
- optional LARGE: 12-WAY BLADE (2.400 MM WIDTH)

TILLER
- STANDARD VERSION
WIDTH INCLUDING FLAPS: 2.300 MM
WORKING WIDTH: 1.900 MM
- LARGE VERSION
WIDTH INCLUDING FLAPS: 2.800 MM
WORKING WIDTH: 2.300 MM
ROTATION SPEED: MAX 2.000 RPM
POLYURETHANE FINISHER
QUICK-RELEASE SYSTEM

TRACKSETTERS
UP TO 2 INDEPENDENT TRACKSETTERS
QUICK-RELEASE SYSTEM

FAVERO LORENZO s.a.s. & C.
COSTRUZIONE MACCHINE NEVE



Via delle industrie, 1
31040 Trevignano (TV) Italy
Tel/Fax + 39-0423-677110

www.faverolorenzo.com
info@faverolorenzo.com

DISTRIBUTED BY:

Snow & Bike
Schmidt
FAHRZEUGHANDEL und REPARATUR
Inh. Schmidt Wilhelm
A-6460 Imst, Industriezone 55

Tel.: +43(0) 5412/ 66 884 • FAX: 66 884 16
e-mail: skidoo.schmidt@oni.at • www.snow-bike.at



NEW
SNOW RABBIT 3



FAVERO

NEW SNOW RABBIT 3

SMALL, LIGHT AND RELIABLE. THE NEW SNOW RABBIT 3 IS THE IDEAL VEHICLE FOR TRANSPORT, SNOW CLEANING WORK AND CROSS-COUNTRY SKI TRAIL PREPARATION.

NOW WITH EUR4 CERTIFIED ENGINE




THE SMALL SNOW RABBIT 3 IS THE PERFECT PARTNER FOR TRANSPORTING GOODS AND GROOMING TRAILS, SMALL PISTES, LIFT TRACKS, SNOWMOBILE TRAILS, AND PREPARING MINOR CROSS-COUNTRY SKI TRAILS WITH TWO TRACKS.

ITS COMPACT SIZE AND 0° TURN RADIUS GRANT PERFECT MANOEUVRABILITY EVEN IN THE TIGHTEST FOREST PATHS. THE SNOW RABBIT 3 IS EQUIPPED WITH ALLUMINIUM TRACKS AND STEEL ICE CAULKS, FOR PERFECT RESULTS, NO MATTER WHAT THE QUANTITY AND CONDITION OF THE SNOW OR THE STEEPNESS OF THE GROUND.

THANKS TO THE FULLY USEABLE REAR PLATFORM, WHICH CAN ACCOMMODATE WEIGHTS OF UP TO 750 KG, THE SNOW RABBIT 3 IS THE IDEAL CHOICE FOR TRANSPORTING LOADS ON SNOW. IT CAN ALSO BE EQUIPPED WITH REAR CABIN WITH BACK OPENING, A WELL-PROTECTED PLACE FOR GOODS, EVEN IN BAD WEATHER CONDITIONS.

THE NEW VM DIESEL ENGINES WITH COMMON-RAIL SYSTEM OFFER HIGH RELIABILITY AND DURABILITY, SMOOTH AND REGULAR RUNNING, WHILE MEETING THE TIER 4i INTERIM / STAGE IIIB EMISSIONS REGULATIONS.

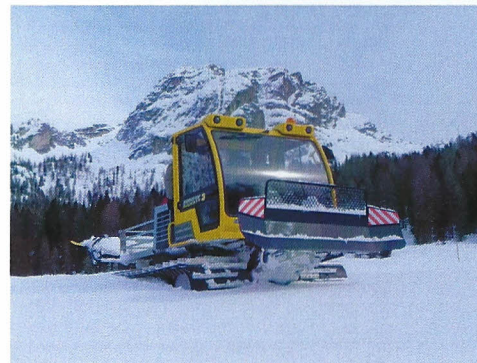

THE DRIVER'S CABIN, THANKS TO ITS LARGE WINDSCREEN, SLIDING SIDE AND REAR WINDOWS, PROVIDES OPTIMAL ALL-ROUND VISIBILITY, WHILE A PLEASANT LOW-NOISE ENVIRONMENT IS GRANTED BY MEANS OF VARIOUS INSULATING PANES.

THE CONTROL PANEL IS USER FRIENDLY, ALL IMPORTANT FUNCTIONS CAN BE EASILY ACCESSED BY THE DRIVER FOR THE MOST EFFICIENT CONTROL. STEERING AND ATTACHMENTS OPERATIONS ARE CONTROLLED VIA TWO ERGONOMICALLY DESIGNED JOYSTICKS.

VARIOUS ATTACHMENTS ARE AVAILABLE, IN ORDER TO GRANT THE BEST VERSATILITY OF THE VEHICLE TO USERS' NEEDS. ALONGSIDE THE 8-WAY BLADE AND THE STANDARD TILLER, WITH THEIR 2,000 MM OF WIDTH, THE NEW "LARGE" VERSIONS CAN WORK ON GREATER SURFACES. THANKS TO ITS LATERAL THE LARGE 12-WAY BLADE REDUCES THE ACCUMULATION WHEN MOVING GREAT VOLUMES OF SNOW. BOTH THE STANDARD AND THE LARGE TILLER CAN BE EQUIPPED WITH UP TO TWO INDEPENDENT TRACK SETTERS.

